

SECTION A-A (through bay centre, robot inside)

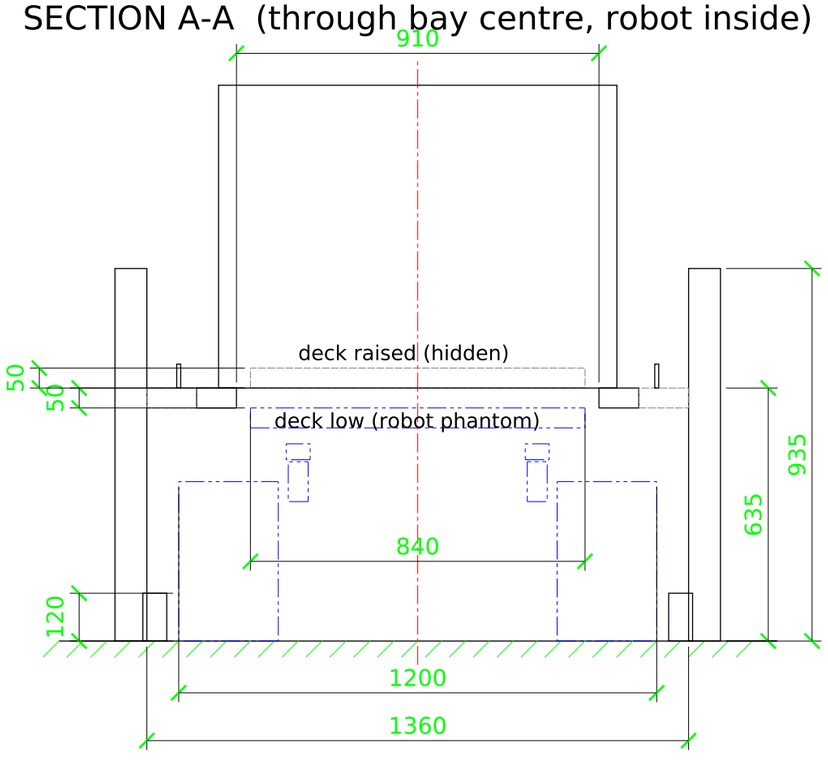

→ robot enters TOP VIEW (entry from the left = robot rear side)

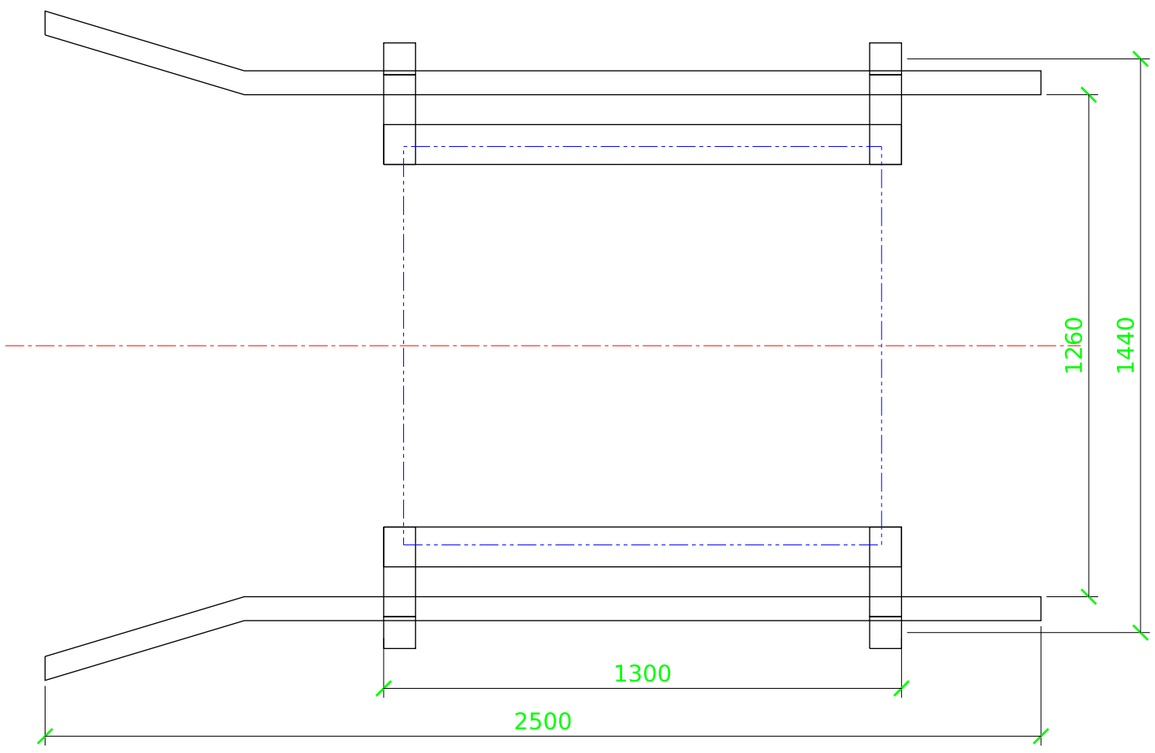

CUT LIST

#	Part	Section	L mm	Qty	kg
1	Post (+ base plate 200x200x10)	SHS 80x80x4	935	4	48.1
2	Ledge (laid flat)	RHS 100x50x4	1300	2	23.2
3	Arm post → ledge	RHS 80x50x4	265	4	8.1
4	Bin keeper	FL 60x10	1300	2	12.2
5	Track guide + 500 flare	RHS 120x60x4	2520	2	54.4
6	UHMW wear strip on ledge	PE 100x10	1300	2	0.0
				TOTAL ≈	146 kg

NOTES

1. EMPTY bays as drawn. FULL bays: each post on a 1 t load cell + certified indicator (NAWI class III) → official weight of every bin, logged by base PC.
2. Open underneath and at both ends: nothing below 635 mm except the ledges.
3. Concrete or compacted gravel pad, level ±10 mm. Anchor base plates with 4x M12 each.
4. AprilTag on the far post pair + LiDAR reflectors for final positioning (±30 mm).
5. Ledge positions to be checked against the real bin's skids before welding.
6. Paint posts yellow/black. Bays 2.2 m apart (centre to centre).

BINBOT — autonomous olive bin carrier

BASE BIN STAND — ROBOT DRIVES UNDER

DWG 003 REV B SCALE 1:15 (A3) UNITS mm

PRELIMINARY — undercarriage values assumed 2026-10-28